

Key Features:

- **220-290VDC** Continuous Input Voltage
- **1800V** Isolation Between Input /Output
- Active Input EMI Filtering
- Transient look ahead/cut-off technology
- 4 Voltage output Rails for 12V centric systems
- Isolated 3.3V aux standby feature
- 850W Continuous Power
- 93% Typical Efficiency
- -40°C to 85°C Rail Operating Temperature
- VITA 62 3U Form Factor
- VITA 46.11 ready
- Patent pending **FourRail** thermal interface
- **[SMART.PSU]** Technology

VITA 62 3U ISOLATED 850W 270VDC POWER SUPPLY

This 3U power supply works with **270VDC input** isolates the input voltage ground from the output voltage ground. The power supply is **conduction cooled**, uses **poly-phase** technology on all voltage rails and can provide up to **850 watts**. It is suitable for use in **mission critical rugged applications**.

[SMART.PSU] PCI-Systems Inc. intelligent power supplies integrate a **microcontroller** (MCU) for a fully programmable and flexible solution. Intelligent power conversion allows **configuration and reconfiguration** for different applications. With intelligent power conversion, the power supply becomes a platform solution for Vita 46.11 system management based systems. The power supply can easily be **reprogrammed** to support different **operating limits and control inputs**.

Features:

- Parallel operating with multiple power supplies, all rails
- Load sharing and balancing
- Digital On/Off control for low standby power
- Input / Output Voltage rail setting /adjustment
- Spread Spectrum Clocking of power supply stages
- Power supply sequencing
- Power supply history logging and fault management
- Monitoring all output voltages, currents and power
- Automatic temperature drift compensation for all outputs
- Total-Elapsed-Time Recorder
- Communication via SMB/I2C (PMB)for Vita 46.11 system management
- Over temperature protection
- Precision compensation of all output voltages using integrated 5ppm voltage reference

Overview	
P/N	PCI_800.117
Hold Up time	TBD
VITA Compliant	VITA62
Size	3U
Temp. Range	-40 +85 C
Input (AC or DC)	DC
Input Range	270
Active EMI Filtering	YES
Power (W, max.)	850
Efficiency (%), typ.)	93
# of outputs	4

FEATURES	
Over-current Protection	YES
Over-voltage Protection	YES
Over-temperature Protection	YES
Current Sharing	VS1, VS2, VS3
Remote Sense	YES
Standard Control	YES, VITA62
Extended Control	YES, PCI Systems

OUTPUTS (Total output not to exceed 850W)	
VS1, V@A	+12@60A
VS2, V@A	+3.3@20A
VS3, V@A	+5@50A
AUX, V@A	+3.3@6A
AUX, V@A	N/A
AUX, V@A	N/A

Designed to meet the following standards, additional circuitry inside the chassis may be required	
VITA62	YES
MIL-STD-704 (B-F)	YES
MIL-STD-461	YES
MIL-STD-810G	YES
* ESD Protection	YES
* Shock	YES
* Vibration	YES
* Rapid Decompression	YES
* Corrosion Resistance	YES
* Fungus Resistance	YES
* Altitude	YES
* Humidity	YES

INPUT CHARACTERISTICS						
Parameter	Min.	Typ.	Max.	Units	Notes	
Absolute Maximum Ratings						
Input Voltage						
- Non-Operating			600	V	Continuous	
- Operating			290	V	Continuous- Reverse input Protection	
- Operating Transient Protection			350	V	100ms transient, square wave	
Isolation Voltage			1800	V		
Operating Temperature	-40		85	C		
Storage Temperature	-55		105	C		
Electrical Characteristics						
Input Voltage						
- Continuous	220	270	290	V		
Under-Voltage Lockout						
- Turn-On Input Voltage Threshold	190	200	210	V		

INPUT VOLTAGE SPIKES SUPPRESSION (Vin Centered)

Designed to meet the following standards, additional circuitry inside the chassis may be required

+/- 450V, 100 us	MIL-STD-1275D
+/- 490V, 10 us	MIL-STD-461C (CS06); DEF-STAN 61-5
+/- 450V, 5 us	MIL-STD-461C (CS06)
+/- 600V, 10 us	RTCA/DO-160E

OUTPUT CHARACTERISTICS



Parameter	+12V	+5V	+3.3V	+3.3V aux	+12V aux	-12V aux	Notes
Output Voltage Set Point, V	12	5	3.3	3.3	N/A	N/A	Vin = 270VDC
- Drift -40 deg.C to 85degC +/- %	0.01	0.01	0.01	0.01			Vin = 270VDC
Output Voltage Trim Range, V	12	5	3.3	3.3			Over Line/load/temp.
	+/- 10%	+/- 10%	+/- 10%	+/- 10%			Over Line/load/temp.
Output Voltage Ripple (pk-pk), mV	80	50	40	40			Full load with 1 uF + 10 uF tantalum capacitor at each rail, each slot
Operating Current Range, A	0-60	0-50	0-20	0-6			850W Total, combined Output
Over-Voltage Protection, V	13	6	3.6	3.6			
Current Limit Inception, A	62	52	22	5			
Maximum Output Capacitance, mF	10	10	10	1			

MODULE QUALIFICATION

Designed to meet the following standards, additional circuitry inside the chassis may be required


Test Name	Method
Random Vibration	MIL-STD-810, 514.6 - Procedure I, Class V3
Shock	MIL-STD-810, 516.6 - Procedure I, VI, Class OS2
Altitude	MIL-STD-810, 500.5 - Procedure I, II, III
Fungus Resistance	MIL-STD-810, 508.6
Corrosion Resistance	ASTM G85, Annex A4
Humidity	MIL-STD-810, 507.5 - Procedure II
High Temperature	MIL-STD-810, 501.5 - Procedure I, II
Low Temperature	MIL-STD-810, 502.5 - Procedure I, II
Temperature Cycling	MIL-STD-202, 107 - Class C4
ESD	EN61000-4-2, Level 4; 15kV Air Discharge

Block Diagram:

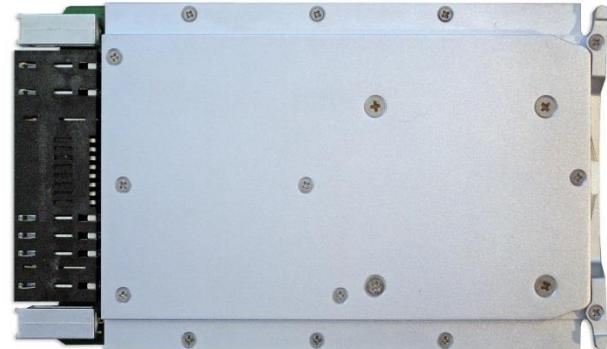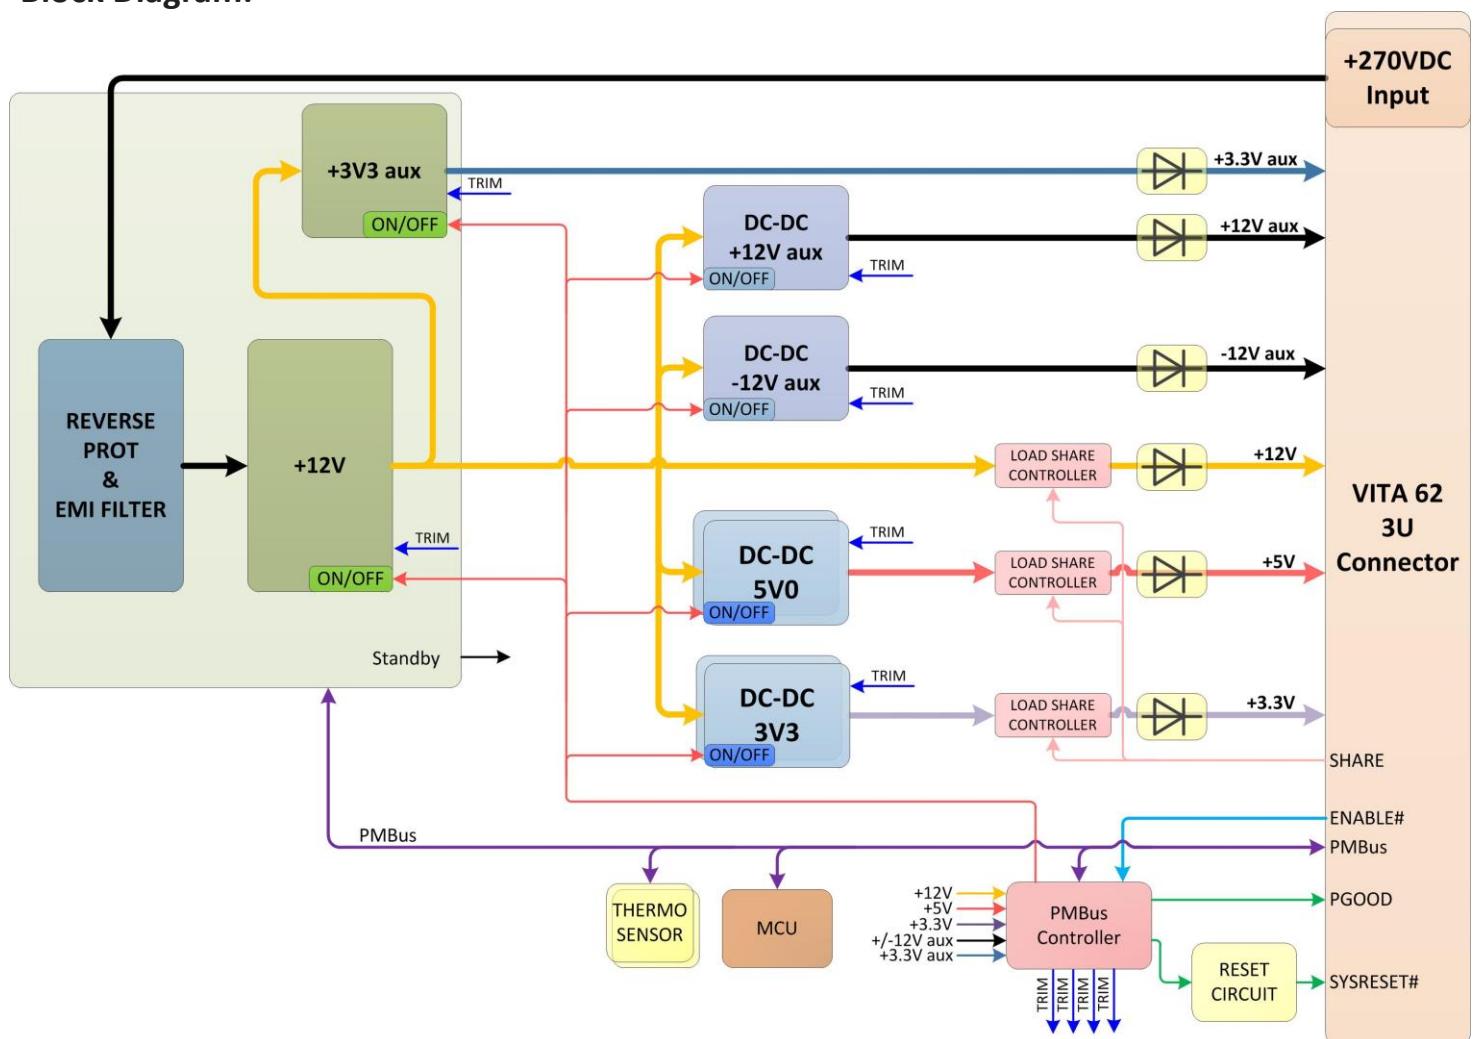


Pin-out: As per VITA 62 specification

Mechanical Dimensions: As per VITA 62 specification (1.2(a)" pitch)

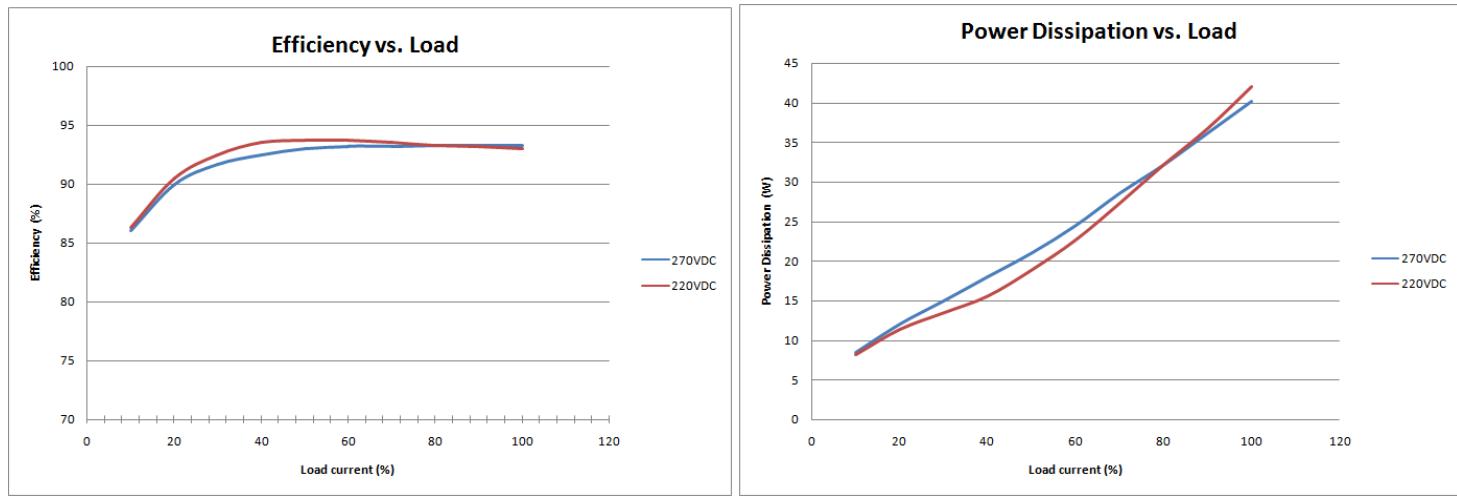

Efficiency and Power Dissipation at nominal output voltage vs. load current at 25°C

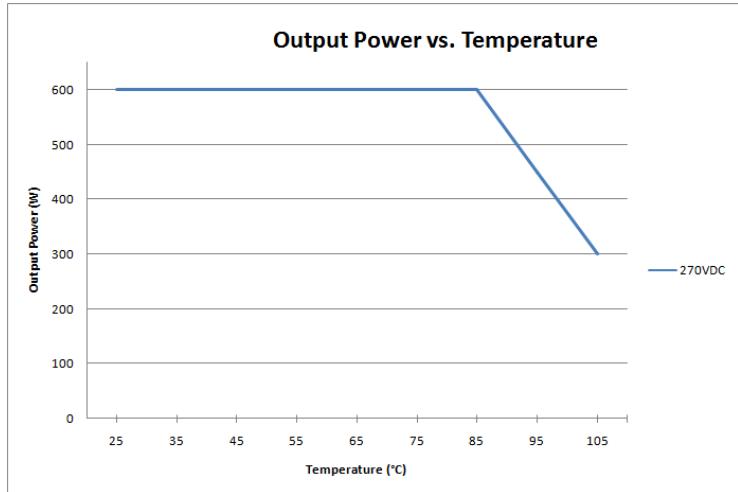

Thermal derating

Max. Output Power vs. temp at module cover.

(**Delta T to wedgelock 7°C**)

ORDERING INFORMATION:

PCI_800.117

PCI_800.117_C

3U VITA 62 270VDC 850W Isolated Rugged Power Supply

Version with Conformal Coating